

ALPHA^coustic-Tondo

CURVED FABRIC ACOUSTIC PANELS



5 **ALPHA**coustic-AP.Tondo

CURVED **RECTANGULAR** ACOUSTIC PANELS

A classic rectangular form panel that can be easily placed on walls or ceilings.



9

ALPHAcoustic-Kiklos.Tondo

CURVED **CIRCULAR** ACOUSTIC PANELS


A circular form panel that can be easily placed on walls or ceilings.

13

ALPHAcoustic-Multi.Tondo

CURVED **MULTI-PATTERN** ACOUSTIC PANELS

An innovative multi-form panel that comes in different patterns with high installation flexibility. Unlimited shape combinations, absolute creative and expressive freedom.

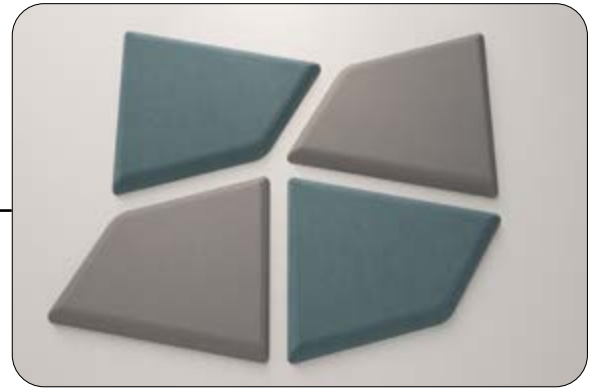

17

ALPHAcoustic-AB.Tondo

CURVED ACOUSTIC VERTICAL **BAFFLES**

Vertically hanged acoustic baffles, that make the most of both panel sides for better acoustic performance.



21

ALPHAcoustic-AM.Tondo

CURVED SELF-STANDING PARTITIONS


A floor-standing sound-isolating panel. Ideal for office or working areas where a quiet and well-being environment is crucial.

25

ALPHAcoustic-Desk.Tondo

CURVED DESK PARTITIONS

Round form panels that can be applied on three sides of any desk. Offers visual and acoustic separation in an open-plan office

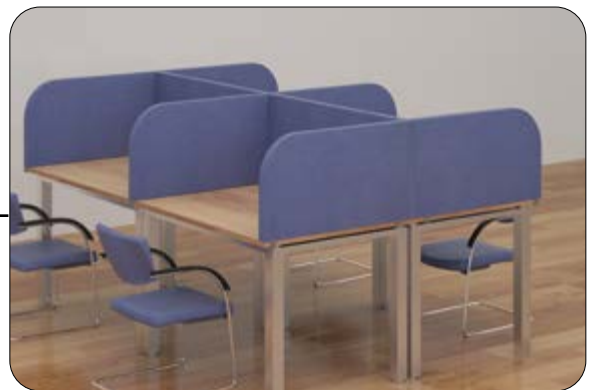

29

ALPHAcoustic-Kéros

CYCLADIC FORM ACOUSTIC PANELS

Inspired by Kéros island, a Cycladic civilization flourished in the central Aegean sea about 2500 BC. Flat-faced Cycladic marble figurines were found through excavations on the island.

ALPHAacoustic-AP.Tondo

CURVED RECTANGULAR ACOUSTIC PANELS



DESCRIPTION





ALPHAcoustic-AP.Tondo is an acoustic panel wrapped with acoustic transparent fabric. It offers reduction of disturbing noise reflections, improving the interior acoustics, reducing the reverberated noise, offering a better acoustic environment. The AP.Tondo panels are rectangular form with smooth vertexes and curved perimeter edges.

MAIN CHARACTERISTICS

- Refined and elegant
- Smooth, flowing design
- Soft curves that suggest comfort, safety, familiarity and relaxation, that recall the curves of the human body
- Ability to adapt perfectly to any living space

TYPICAL APPLICATIONS

- Reception areas
- Offices
- Restaurants
- Recording studios
- Discos
- Waiting rooms
- Classrooms
- Clubs
- Call-centers

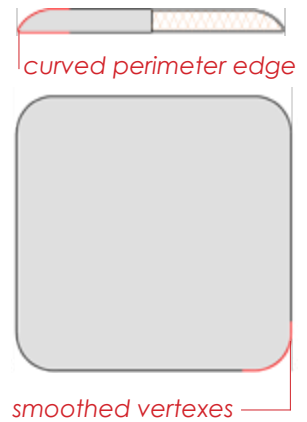

ACOUSTIC CHARACTERISTICS

ALPHAcoustic-AP.Tondo is specifically designed to achieve maximum sound absorption at a specific acoustic range band. Our team of acoustic engineers can assist in choosing the acoustic panel with the most adequate sound absorption index (α_s) for your project according to ISO 354.2003 and ISO 11654.1997.

Indicative practical sound absorption coefficient (α_p) and weighted sound absorption coefficient (α_w) can be found in the following table:

Type: ALPHAcoustic-AP.Tondo	Practical Sound Absorption Coefficient (α_p)						Weighted Sound Absorption Coefficient (α_w)	Sound Absorption Class
	Frequency (Hz)							
	125	250	500	1000	2000	4000		
Thickness 30 mm	0.05	0.30	0.75	0.80	0.90	0.85	0.80	B
Thickness 50 mm	0.20	0.75	0.90	1	1	1	1	A

Depending on the requirements of each application and in order to achieve sound absorption in a wide range of frequencies, a combination of different sound absorptive materials can be applied.

INSTALLATION

Curved rectangular acoustic panels **ALPHA**coustic-AP.Tondo can be easily placed on the wall and the ceiling with their simple hanging system at the back of the panel.

EXTERNAL COVERING

Acoustic Panels **ALPHA**coustic-AP.Tondo are available with different external covering depending on the aesthetics of each project. The most common is a special sound transparent fabric with high endurance and excellent quality.


They are available in various colours and can be self extinguished.

** Flammability test EN13501-1 Class B, s2, d0*

INTERNAL ACOUSTIC CORE

Trying to achieve the best sound absorption with our **ALPHA**coustic-AP.Tondo acoustic panels, and taking into consideration environmental factors, we selected **iziFON®** Polyester fiber slabs, a type of acoustic material produced by recycled plastic, for use inside our acoustic panels. Other acoustic materials can be used according to specific acoustic needs.



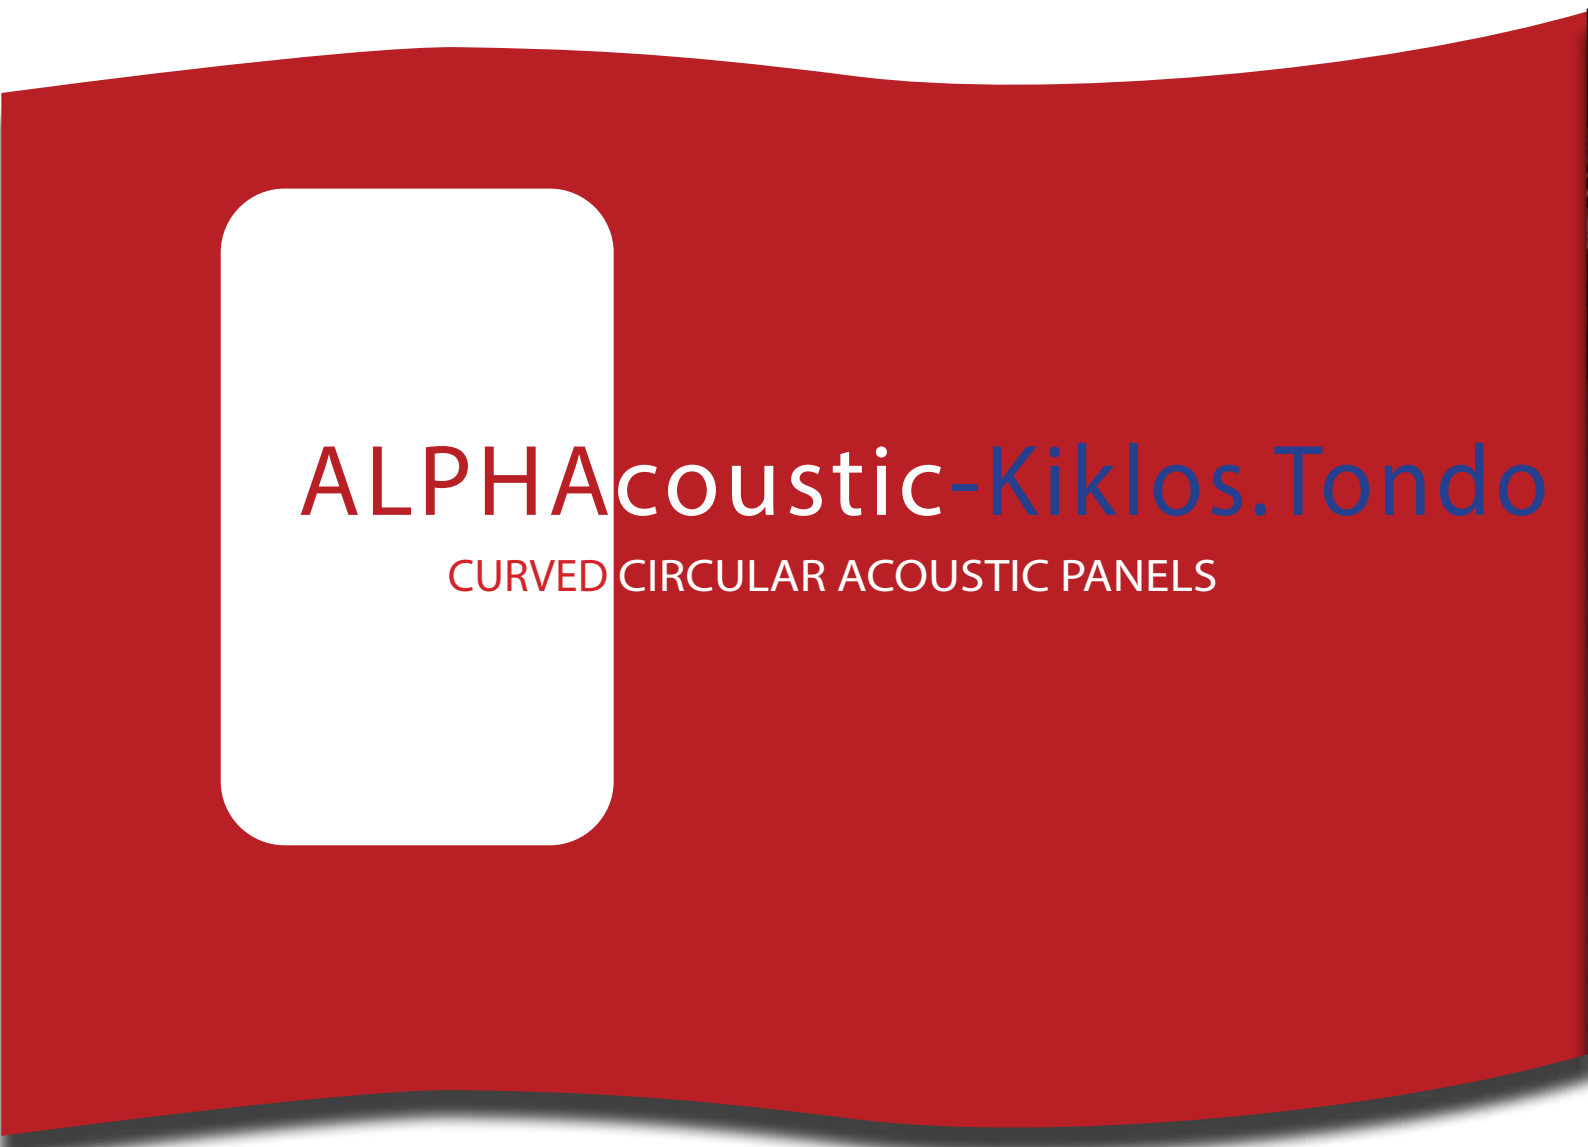

ALPHAacoustic-Kiklos.Tondo

CURVED CIRCULAR ACOUSTIC PANELS



DESCRIPTION



ALPHAcoustic-Kiklos.Tondo is a circular/round acoustic panel wrapped with acoustic transparent fabric. It offers reduction of disturbing noise reflections, improving the interior acoustics, reducing the reverberated noise, offering a better acoustic environment. The Tondo panels are circular/round form with curved perimeter edge.

MAIN CHARACTERISTICS

- Refined and elegant
- Smooth, flowing design
- Soft curves that suggest comfort, safety, familiarity and relaxation, that recall the curves of the human body
- Ability to adapt perfectly to any living space

TYPICAL APPLICATIONS

- Reception areas
- Offices
- Restaurants
- Recording studios
- Discos
- Waiting rooms
- Classrooms
- Clubs
- Call-centers

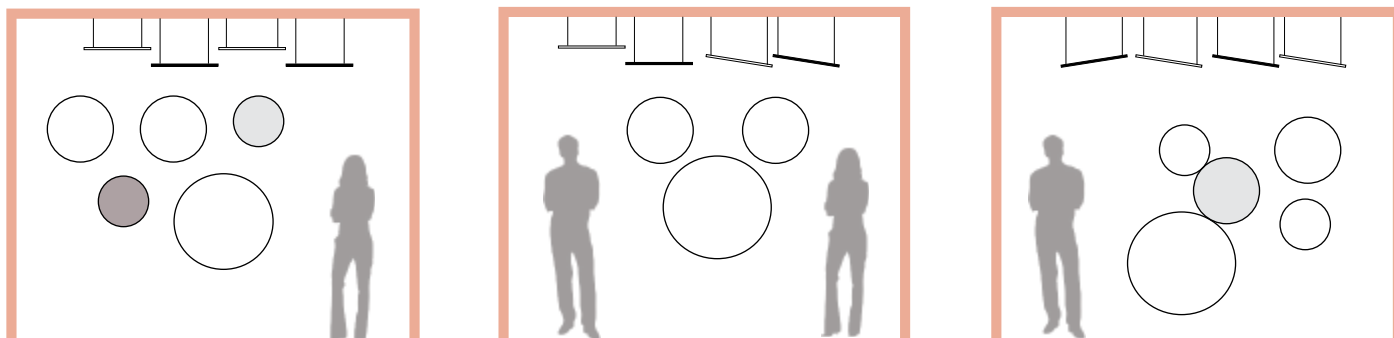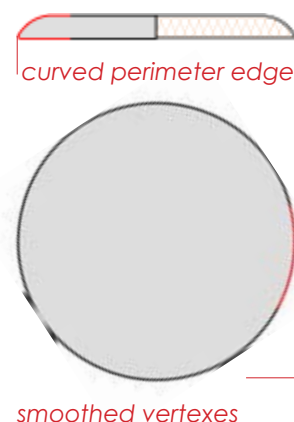

ACOUSTIC CHARACTERISTICS

ALPHAcoustic-Kiklos.Tondo is specifically designed to achieve maximum sound absorption at a specific acoustic range band. Our team of acoustic engineers can assist in choosing the acoustic panel with the most adequate sound absorption index (α_s) for your project according to ISO 354.2003 and ISO 11654.1997.

Indicative practical sound absorption coefficient (α_p) and weighted sound absorption coefficient (α_w) can be found in the following table:

Type: ALPHAcoustic-Kiklos.Tondo	Practical Sound Absorption Coefficient (α_p)						Weighted Sound Absorption Coefficient (α_w)	Sound Absorption Class
	Frequency (Hz)							
	125	250	500	1000	2000	4000		
Thickness 50 mm	0.20	0.75	0.9	1	1	1	1	A

Depending on the requirements of each application and in order to achieve sound absorption in a wide range of frequencies, a combination of different sound absorptive materials can be applied.

EXTERNAL COVERING

Acoustic Panels **ALPHAcoustic-Kiklos.Tondo** are available with different external covering depending on the aesthetics of each project. The most common is a special sound transparent fabric with high endurance and excellent quality.

They are available in various colours and can be self extinguished*.

Please refer to our fabric **ALPHAcoustic-CL**

* *Flammability test EN13501-1 Class B, s2, d0*

INTERNAL ACOUSTIC CORE

Trying to achieve the best sound absorption coefficient with our **ALPHAcoustic - Kiklos.Tondo** acoustic panels, and taking into consideration environmental factors, we selected **IZIFON®** Polyester fiber slabs, a type


of acoustic material produced by recycled plastic, for use inside our acoustic panels. Other acoustic slabs can be selected, according the specific demand.



INSTALLATION

Modular Acoustic Panels **ALPHAcoustic-Kiklos.Tondo** can be easily placed on the wall and the ceiling with their simple hanging system at the back of the panel.

ACCESSORIES



ALPHAcoustic-HS: Vertical hangers with stainless steel wire and height adjustable roof suspension mechanism.




The acoustic panel **ALPHAcoustic-Kiklos.Tondo** can be produced in different shapes, dimensions and thickness upon request and also **led lighting systems** can be adapted. ([Contact us for more information](#))



ALPHAacoustic-Multi.Tondo

CURVED MULTI-PATTERN ACOUSTIC PANELS

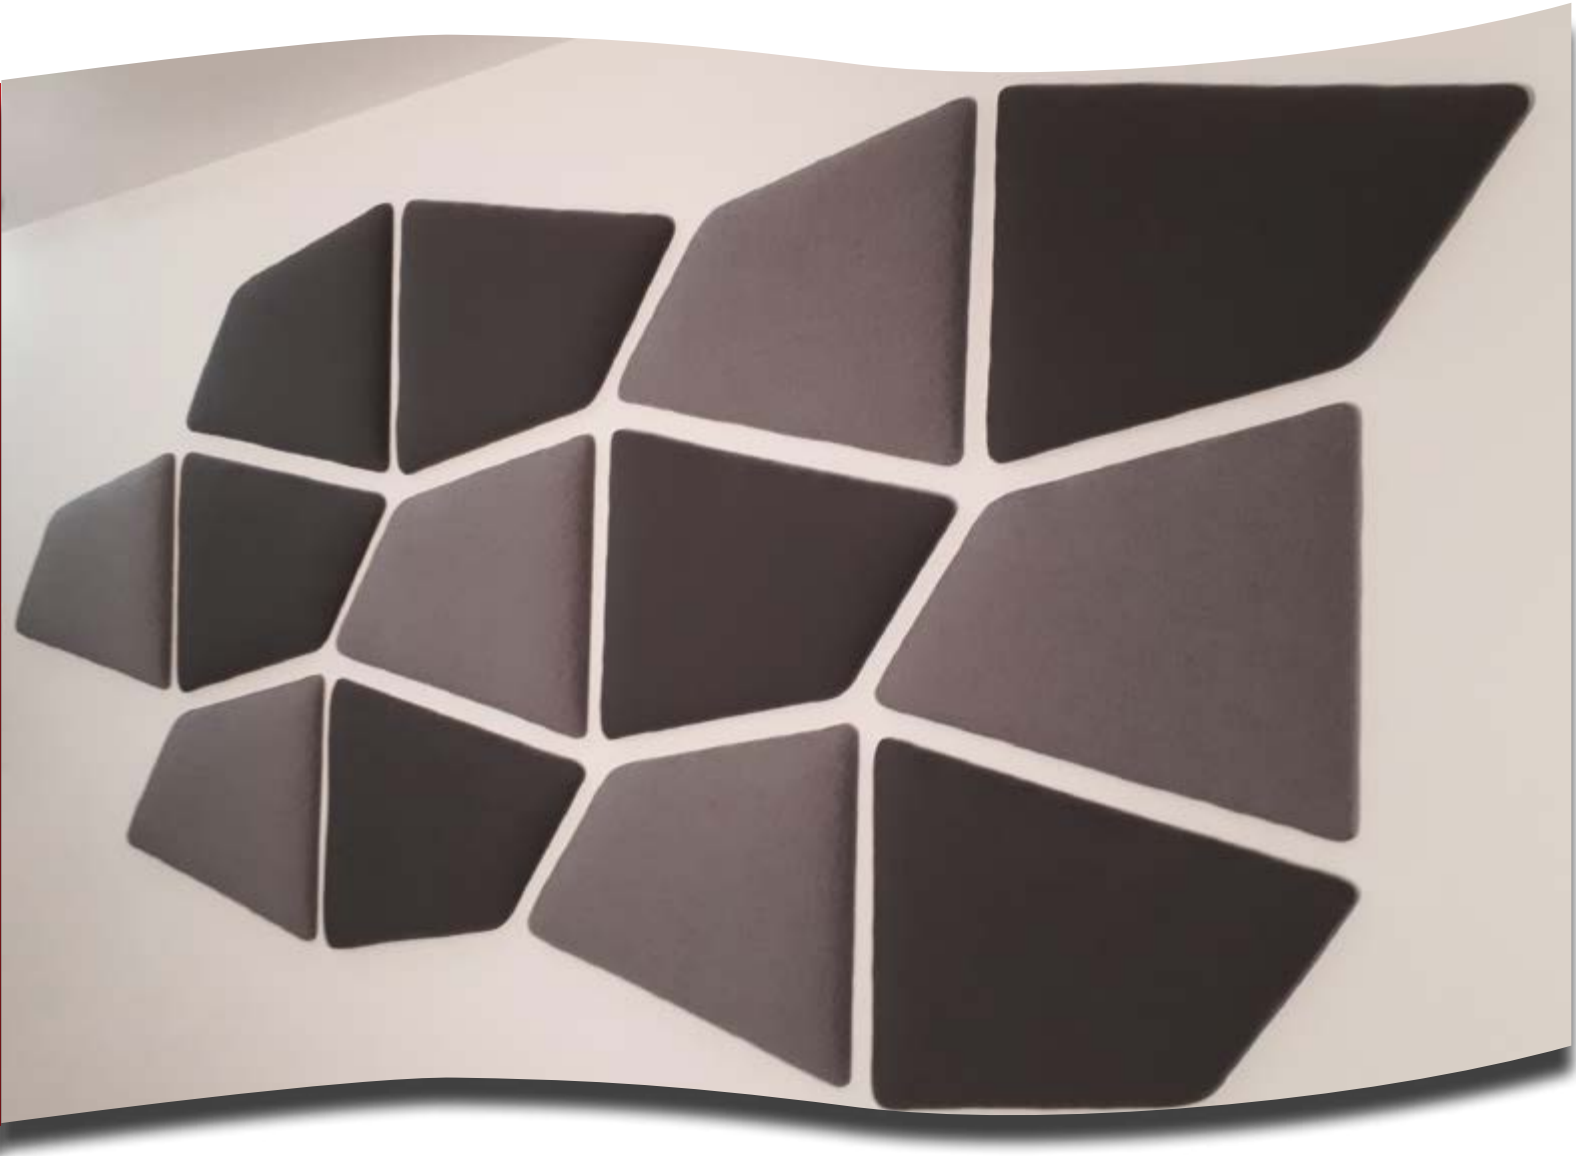

DESCRIPTION



ALPHAcoustic-Multi.Tondo is a multi-pattern, innovative form, acoustic panel wrapped with acoustic transparent fabric. It offers high installation flexibility, with multi combination patterns, according to aesthetic needs. These panels, with their irregular shape, offer an absolute creative and expressive freedom. They offer reduction of disturbing noise reflections, improving the interior acoustics, reducing the reverberated noise. They develop smooth vertexes and curved perimeter edges.

MAIN CHARACTERISTICS

- Refined and elegant
- Smooth, flowing design
- Soft curves that suggest comfort, safety, familiarity and relaxation that recall the curves of the human body
- Ability to adapt perfectly to any living space

TYPICAL APPLICATIONS

- Reception areas
- Offices
- Restaurants
- Recording studios
- Discos
- Waiting rooms
- Classrooms
- Clubs
- Call Centers

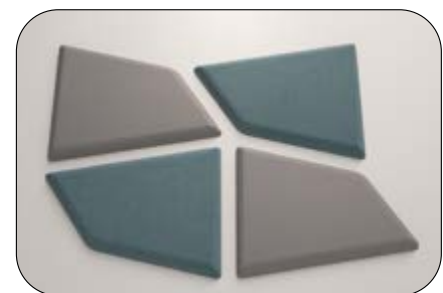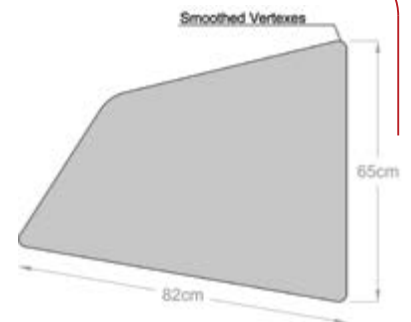

ACOUSTIC CHARACTERISTICS

ALPHAcoustic-Multi.Tondo is designed to achieve maximum sound absorption at a specific acoustic range band. Our team of acoustic engineers can assist you choosing the acoustic panel with the most adequate sound absorption index (α_s) for your project according to ISO 354.2003 and ISO 11654.1997 Indicative practical sound absorption coefficient (α_p) and weighted sound absorption coefficient (α_w) can be found in the following table:

Type: ALPHAcoustic-Multi.Tondo	Practical Sound Absorption Coefficient (α_p)						Weighted Sound Absorption Coefficient (α_w)	Sound Absorption Class
	Frequency (Hz)							
	125	250	500	1000	2000	4000		
Thickness 30 mm	0.05	0.30	0.75	0.80	0.90	0.85	0.80	B
Thickness 50 mm	0.20	0.75	0.90	1	1	1	1	A

Depending on the requirements of each application and in order to achieve sound absorption in a wide range of frequencies, a combination of different sound absorptive materials can be applied.

INSTALLATION

Multi-pattern Acoustic Panels **ALPHA**coustic-Multi.Tondo can be easily placed on the wall, with their simple hanging system at the back of the panel. The panels can be also suspended from the ceiling with properly designed system.




EXTERNAL COVERING

Acoustic Panels **ALPHA**coustic-Multi.Tondo are available with different external covering depending on the aesthetics of each project. The most common is a special sound transparent fabric **ALPHA**coustic-CL.CR with high endurance and excellent quality. They are available in 32 different colors and can be self extinguished. Please refer to our specific catalogue.

INTERNAL ACOUSTIC CORE


Trying to achieve the best sound absorption with our **ALPHA**coustic-Multi.Tondo acoustic panels, and taking into consideration environmental factors, we selected **izIFON®** Polyester fiber slabs, a type of acoustic material produced by recycled plastic, for use inside our acoustic panels. Other acoustic materials can be used according to specific acoustic needs.



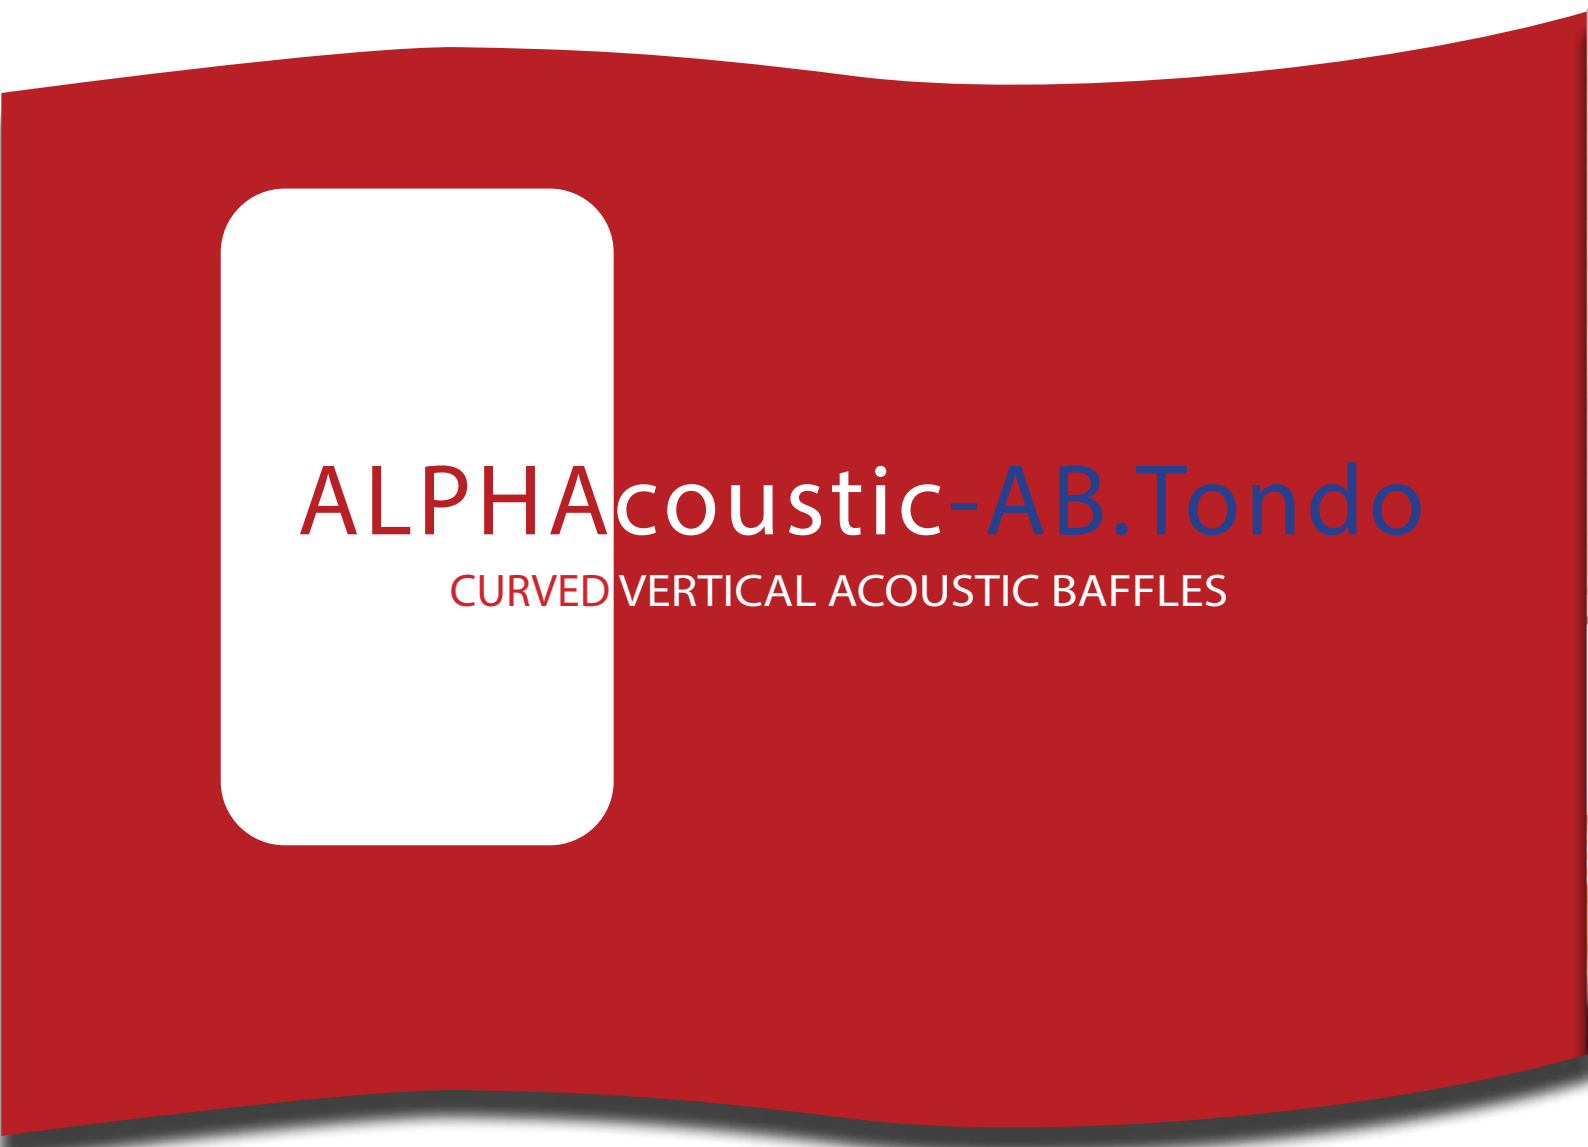

ALPHAcoustic-AB.Tondo

CURVED VERTICAL ACOUSTIC BAFFLES

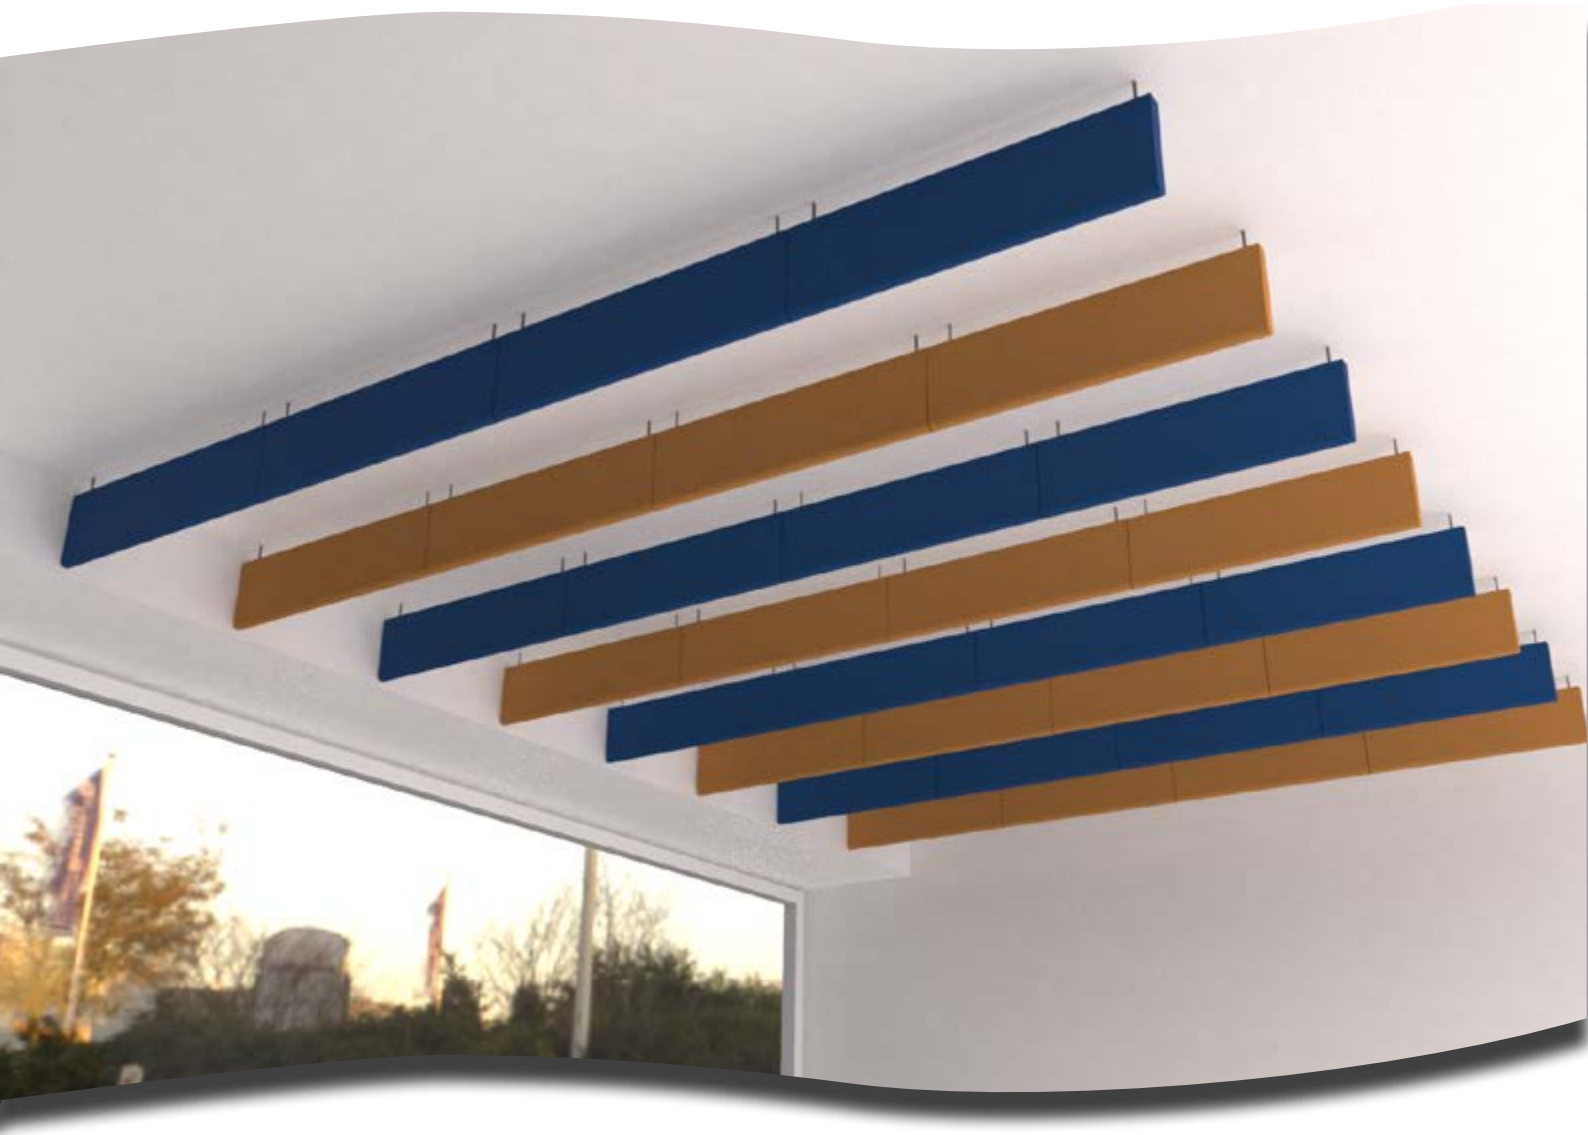

DESCRIPTION

ALPHAcoustic-AB.Tondo are vertically hanged acoustic baffles with curved edges, wrapped with acoustic transparent fabric. They offer reduction of the disturbing noise reflections, improving the interior acoustics, reducing the reverberated noise, offering a better acoustic environment. Due to the two highly absorptive sides of the baffle, it offers high sound absorption.


Typical applications:

- Reception areas
- Offices
- Restaurants
- Recording studios
- Discos
- Waiting rooms
- Classrooms
- Teleconference Rooms
- Call Centers

Standard dimensions 120x60cm and 120x30cm

Regular thickness 50-80-100mm

(Other dimensions & thicknesses upon request)

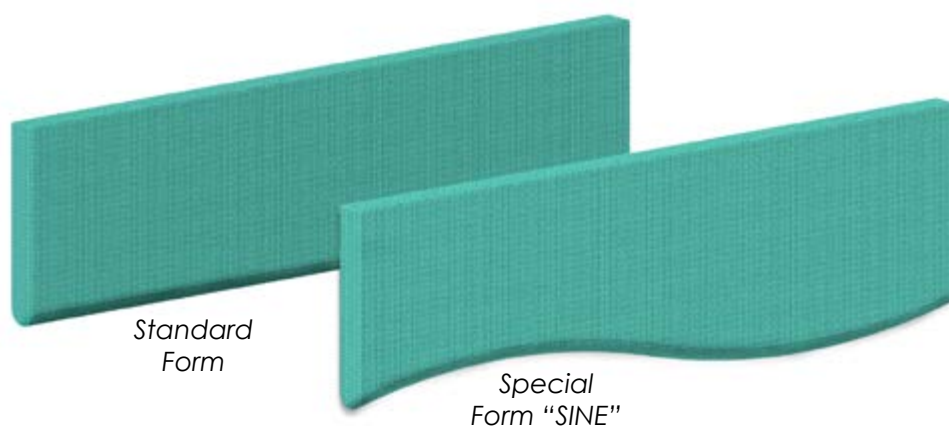

ALPHAcoustic-AB.Tondo

ACOUSTIC CHARACTERISTICS

ALPHAcoustic-AB.Tondo is specifically designed to achieve maximum sound absorption at a specific frequency range. Our team of acoustic engineers can assist in choosing the acoustic baffles with the most adequate sound absorption index for your project according to ISO 354.2003 and ISO 11654.1997.

Indicative sound absorption coefficient (α_N) for baffles with dimensions 1200x600x80 mm with 600 mm spacing can be found in the following table (where α_N is the equivalent sound absorption surface per object).

Type: ALPHAcoustic-AB.Tondo 1200x600x80mm	Frequency (Hz)					
	125	250	500	1000	2000	4000
Sound Absorption Coefficient (α_N)	0.2	0.43	0.98	1.4	1.4	1.3

Depending on the requirements of each application and in order to achieve sound absorption in a wide range of frequencies, a combination of different sound absorptive materials can be applied.

In order to determine the required quantity and configurations of acoustic baffles, an acoustic study is recommended.

INSTALLATION

Acoustic Vertical Baffles **ALPHAcoustic-AB.Tondo** can be easily hanged from the ceiling with their simple two-point hanging system at the top of the panel.

EXTERNAL COVERING


The curved Acoustic baffles are available with different external covering, depending on the aesthetics of each project. The most common is a special sound transparent fabric with high endurance and excellent quality **ALPHAcoustic CL-CR**.

They are available in various colours and can be self extinguished (*Flamability test EN13501-1 Class B, s2, d0*).

For more color options, please refer to our sound transparent fabric **ALPHAcoustic CL**. Due to their increased sound transmissibility, the sound absorption capabilities of the internal material are not affected.



ACCESSORIES



ALPHAcoustic-HS: Vertical hangers with stainless steel wire and height adjustable roof suspension mechanism.

*The acoustic baffles **ALPHAcoustic-AB.Tondo** can be produced in different shapes, dimensions and thickness upon request.



ALPHAcoustic-AM.Tondo

CURVED SELF-STANDING ACOUSTIC PARTITIONS



DESCRIPTION

ALPHAcoustic-AM.Tondo are floor self-standing sound absorptive panels that offer a flexible solution in several room acoustics problems, improving the sound diffusion, noise insulation and prevent standing waves generation.

Therefore they increase the productivity of individual employees by offering them quiet and well-being professional atmosphere.

These panels are made of rigid internal core and can be covered with sound-transparent fabric on both sides.

MAIN CHARACTERISTICS

- Refined and elegant
- Smooth, flowing design
- Soft curves that suggest comfort, safety, familiarity and relaxation that recall the curves of the human body
- Cost effective acoustic solution

The AM Tondo panels are round forms, with two curved perimeter edges on the top.



ACOUSTIC CHARACTERISTICS

ALPHAcoustic-AM.Tondo is specifically designed to achieve maximum sound absorption at a specific acoustic range band. The sound absorption coefficient (α_s) according to ISO 354.2003 and ISO 11654.1997 expressed in flat equivalent surface can be found below:

Type: ALPHAcoustic-AM.Tondo	Practical Sound Absorption Coefficient (α_p)						Weighted Sound Absorption Coefficient (α_w)	Sound Absorption Class
	Frequency (Hz)							
	125	250	500	1000	2000	4000		
Thickness 50 mm	0.20	0.75	0.9	1	1	1	1	A

Depending on the requirements of each application and in order to achieve sound absorption in a wide range of frequencies, a combination of different sound absorptive materials can be applied.

TECHNICAL CHARACTERISTICS

Dimensions: 1200x1700 mm*

Thickness: 50 mm

Weight: ~20kg

Edge Radius: R1=15, R2=25 and R3=35cm*

Internal construction: Fiber sound absorption slab/wooden core

External covering: Upholstered according to our wide range of fabrics. Please refer to our **ALPHAcoustic-CL** sound transparent fabric collection.

*Other dimensions and forms available on request.

APPLICATIONS

ALPHAcoustic-AM.Tondo can be applied to visually and acoustically separate “open plan” spaces such as accounting offices, call centers etc. They can also be placed to separate musical instruments in studios, increase the sound absorption and diffusion of a room etc. They can be easily placed, removed or relocated for space rearrangement. They are available in various colors and can be self extinguished.*

* Flammability test EN13501-1 Class B, s2, d0





ALPHAcoustic-Desk.Tondo

CURVED DESK ACOUSTIC PARTITIONS



DESCRIPTION

ALPHAcoustic-Desk.Tondo are desk standing sound absorptive and noise insulation partitions for office desks. They offer a flexible solution in acoustics problems in offices, increasing the sound absorption and noise insulation.


Therefore they increase the productivity of individual employees by offering them quiet and well-being professional atmosphere.

These panels are made of rigid internal frame and can be covered with sound-transparent fabric available in different colours on both sides.

MAIN CHARACTERISTICS

- Refined and elegant
- Smooth, flowing design
- Soft curves that suggest comfort, safety, familiarity and relaxation recalling the curves of the human body
- Cost effective acoustic solution

ALPHAcoustic-Desk.Tondo are round forms panels applied on three sides of desk. Lateral panels have their one free edge curved.

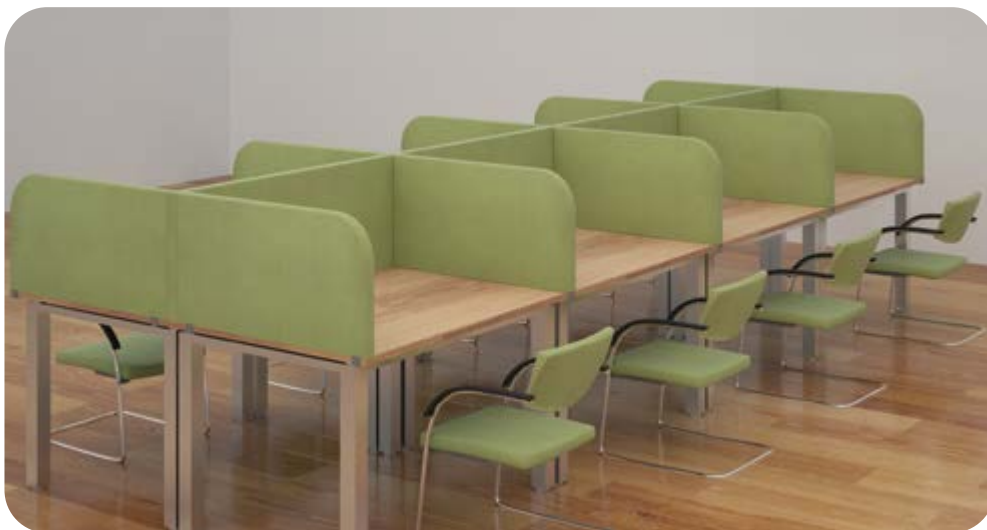

ACOUSTIC CHARACTERISTICS

ALPHAcoustic-Desk.Tondo is specifically designed to achieve maximum sound absorption at a specific acoustic range band. The sound absorption coefficient (α_s) according to ISO 354.2003 and ISO 11654.1997 expressed in flat equivalent surface can be found below:

Type: ALPHAcoustic-Desk.Tondo	Practical Sound Absorption Coefficient (α_p)						Weighted Sound Absorption Coefficient (α_w)	Sound Ab- sorption Class
	Frequency (Hz)							
	125	250	500	1000	2000	4000		
Thickness 50 mm	0.20	0.75	0.9	1	1	1	1	A

Depending on the requirements of each application and in order to achieve sound absorption in a wide range of frequencies, a selection of different sound absorptive materials can be applied.

TECHNICAL CHARACTERISTICS

Dimensions: 1500x500 mm & 800x500 mm*

Thickness: 50 mm*

Lateral edge radius: R1=15, R2=25 and R3=35cm*

Internal construction: Sound absorption slab/wooden core

External covering: Upholstered on both sides according to our wide range of fabrics. Please refer to our [ALPHAcoustic-CL](#) sound transparent fabric collection.

*Other dimensions and forms available on request.



APPLICATIONS

[ALPHAcoustic-Desk.Tondo](#) can be applied on most common types of office desks to visually separate and acoustically insulate “open plan” spaces such as accounting offices, call centers etc. They can be easily placed, removed or relocated in any type of desk surface, using an innovative universal fixing system.

They are available in various colors and can be self extinguished.*

* Flammability test EN13501-1 Class B, s2, d0



ALPHAcoustic- Kéros

CYCLADIC FORM ACOUSTIC PANELS



TECHNICAL CHARACTERISTICS

Max. Height	1200 mm
Thickness	50 mm *
Weight	10 daN * (1200mm)
Internal construction	Fiber sound absorption slab/wooden frame
External covering	Upholstered according to our wide range of fabrics. Please refer to our ALPHAcoustic-CL sound transparent fabric collection, or any digital print textile

*approximately

ACOUSTIC CHARACTERISTICS

ALPHAcoustic-Kéros is specifically designed to achieve maximum sound absorption at a specific acoustic range band. Our team of acoustic engineers can assist in choosing the acoustic panel with the most adequate sound absorption index (α_s) for your project according to ISO 354.2003 and ISO 11654.1997.

Indicative practical sound absorption coefficient (α_p), and weighted sound absorption coefficient (α_w) can be found in the following table, expressed in flat equivalent surface:

Type: ALPHAcoustic-Kéros	Practical Sound Absorption Coefficient (α_p)						Weighted Sound Absorption Coefficient (α_w)	Sound Absorption Class
	Frequency (Hz)							
	125	250	500	1000	2000	4000		
Thickness 50 mm	0.20	0.75	0.9	1	1	1	1	A






Depending on the requirements of each application and in order to achieve sound absorption in a wider range of frequencies, a combination of different sound absorptive materials can be applied.


INSTALLATION

ALPHAcoustic-Kéros acoustic panels offer reduction of disturbing noise reflections. They drastically improve the interior acoustics, reduce the reverberated noise and offer a better acoustic environment.

They can be easily placed on the wall and the ceiling with their simple hanging system at the back of the panel.

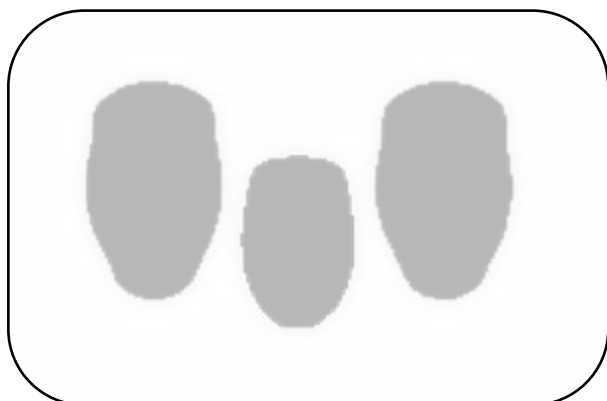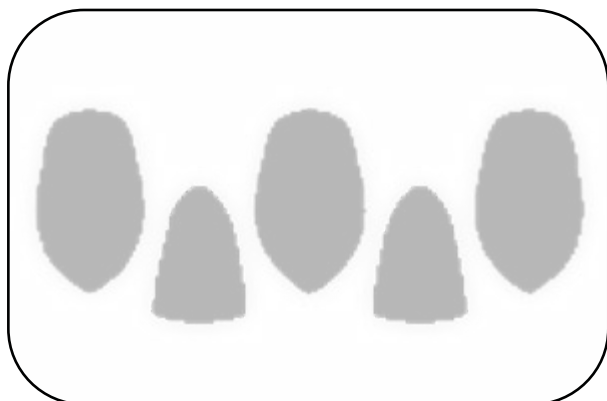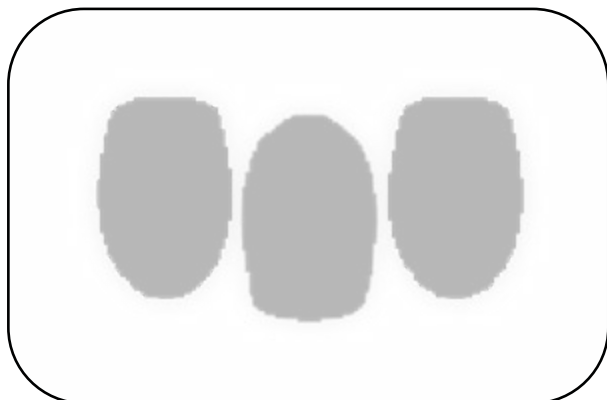

WALL LABEL



Any Kéros composition will be accompanied by an inox label describing the ancient cycladic origins of the newly designed acoustic panels.

EXTERNAL FABRIC COVERING

1.ALPHAcoustic-CL Type:CR

The special sound transparent fabric ALPHAcoustic CL Type CR is used for external covering of the acoustic panels. Due to their increased sound transmissibility, the sound absorption capabilities of the internal material are not affected

Weight	220g/m2 +_ 5% (375g/lin.m. +-5%)
Width	170cm +_ 2% Usable
Abrasion Resistance	Grade A tested in accordance with EN 14465:2003 with a 5 year guarantee of wear-ability (full details available)
Flammability	BS 476 Part 7 Class 1, BS EN 1021 - 1:2006 (cigarette) Note: Flammability performance is dependent on components used.



C.84



C.92



C.73



C.93



C.G.04




C.96



C.72



C.33



C.90



C.16



C.04



C.88



C.48



C.05




C.75



C.89



C.25



C.54




C.80



C.11



C.38



C.76



C.95



C.86



C.85




C.15




C.87



C.38



C.94



C.97

2.ALPHAcoustic-CL Type:Air Mesh

ALPHAcoustic-CL Type Air Mesh is a sound transparent textile that is used to cover acoustic sound absorbing panels. This fabric can cover the sound absorbing material achieving a uniform aesthetic intervention, without affecting the acoustic properties of the material it covers. It has a honeycomb-three dimensional appearance, making it not only visually striking, but providing in-built cushioning for comfort and breathability. With a smooth, plain back and cellular face, it has useful depth between the layers which creates shadow, 3D and texture appearance.

- Due to the unique design, this fabric has high endurance in mechanical stresses.
- Offers high flexibility, that is required for easy upholstery.
- Consists of specially knitted sound transparent polyester mesh fabric.

Basic Colors:

1. Black
2. Charcoal
3. Grey
4. Beige
5. Blue
6. Blue Roy
7. Red
8. White



Colour Matching

Batch to batch variations in shade may occur with commercial tolerances.

Maintenance

Vacuum regularly. Wipe clean with a damp cloth or shampoo using proprietary upholstery shampoo.

INTERNAL ACOUSTIC CORE

Trying to achieve the best sound absorption coefficient taking into consideration environmental factors, we can select various types of acoustic materials that can be used inside our acoustic panels.

Internal acoustic core materials:

FIBRANgeo®	- Stonewool insulation slabs
Ultracoustic®	- Mineral wool with Ecosse® technology
BASOTECH®	- Flexible open cell foam melamine resin
iZIFON®	- Polyester fiber slabs
ISOLFON® PU	- Flexible polyurethane foam
Stratocell® & Ethafoam® Whisper®	- Hydrophobic polyethylene foam



This way we can achieve maximum sound absorption at a specific acoustic range band. Upon request we can help you determine the sound absorption index (α_s) according to ISO 354.2003 and practical sound absorption coefficient (α_p), and weighted sound absorption coefficient (α_p) according to ISO 11654.1997.

ORDER DATA

For better matching our clients needs, we kindly ask to specify through your order the characteristics of the acoustic panels.

Type: ALPHAcoustic -

Dimensions: x mm

Thickness: mm

Internal Core Material:

External Fabric Covering Type:

Code:

Ceiling Suspension Type:

Additional Options :

RESEARCH - DEVELOPMENT - INNOVATION

Our acoustic engineering team with 40 years of experience continuously carries out applied academic research on acoustics, noise and vibration control, working closely with specialized research Institutes and Acoustic Laboratories. This contributes in designing innovative, advanced and effective acoustic control solutions.

Additionally, we carry out, sound absorption index in Acoustic laboratory, in order to determine the characteristics of new, eco-friendly acoustic materials. In order to constantly guarantee high quality, we offer solutions that are tested and certified by independent acoustic laboratories.



LEGAL NOTICE

Because of the reproduction process the quality and colour shown in this catalogue may differ from the real product. Selection of products should always be made from samples. All details and technical information stated in this brochure or other publicity material referring to ALPHA ACOUSTIKI's acoustic systems are based on test reports obtained under laboratory conditions. The customer is responsible to check if these information are suitable for the specific, intended application. The customer is responsible to examine if the information regarding our product are suitable for the specific project application. All technical data is subject to change without prior notice. Our general sales and payment conditions apply. The latest technical data and information can be found in our technical data sheets at alphacoustic.com. The technical information referred in this brochure comes from measurements and tests made in good faith and objectivity and are guideline values We do not assume liability for spelling or printing errors.



In TUNE with YOUR needs

ALPHA ACOUSTIKI combines technical experience and scientific knowledge of its Engineers which are specialized in the field of room acoustics since 1978.

We create workplaces where people choose to work, tailored to the specific requirements of each job, with particular attention to the acoustic necessities of the employee.

DESIGNING FOR WELL-BEING

The concept designed of ALPHAcoustic products puts in practice all fundamentals of well-being.

Focus on employee and workplace well-being, can result in improved productivity, increased confidence, offering a better staff concentration.

Our Acoustic products help to achieve the WELL Building Standard™ Certification.

Our technical department (tech@alphacoustic.com), would be happy to help you improve the Architectural Acoustics in your project.



CONTACT



ALPHA ACOUSTIKI
73, Apostolopoulou Str.
Chalandri, 15231 Greece



T: +30 210 6779875
F: +30 210 6779269



info@alphacoustic.com
www.alphacoustic.com